


ROHS

REV.	ECR	REVISION RECORD	ECN NO.	DRAW	DATE
A		NEW		VINEE	19/08/8
B		UPDATED NOTES		VINEE	20/05/27

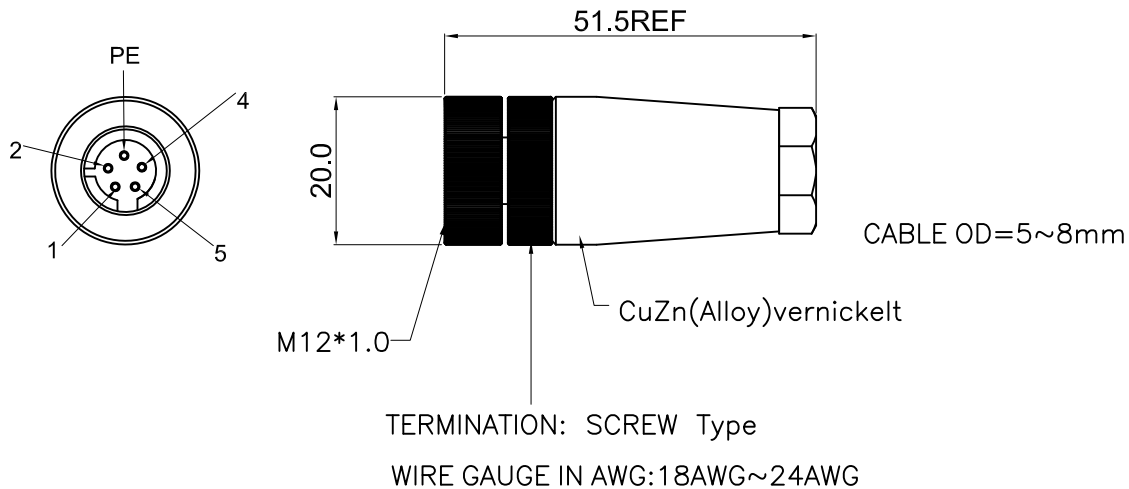

Electrical character
 Rating voltage: 250V AC/DC ,
 Insulation resistance: >100MΩ
 Rating current :4A
 Contact resistance≤10 mΩ

Other Specification
 Contact PIN: Brass with Gold plating.
 Coupling nut/screw: CuZn(Messing)vernickelt
 Insulation plastic: PA66+GF
 Degree of protection: IP67
 *ALL MATERIALS ARE RoHS COMPLIANT,

GENERAL TOLERANCES (UNLESS SPECIFIED)	UNITS:	SCALE:	SHEET NO.	Shenzhen Ximeconn Connector Technology Co., Ltd			
	mm	1:1	1 of 1				
	X.XXX± 0.1	REV:	DRAWN BY		DATE	M12 C CODE FEMALE CONNECTOR WITH SOLDER TERMINAL	
	X.XX± 0.2	A0	Vinee	18/05/29			
X.X± 0.3	CHECKED BY	/	DATE	/			
ANGULAR± 3°	APPROVED BY	Ben	DATE	19/05/29	PART NO. M12-F5PC-PLASTIC	DOCUMENT NO. XM-WI-RD002	SIZE A4



These drawing and specification are the property of Shenzhen Xime Connector Technology Co., Ltd. And shall not be reproduced copied or used in any manner without the prior written Consent of ours. Company website:www.ximeconn.com