


MOLD NO. RFQ NO. : XXXXXX

REV.	DESCRIPTION	APPD.	DATE
A	INITIAL RELEASED	WANG	08/18/18'

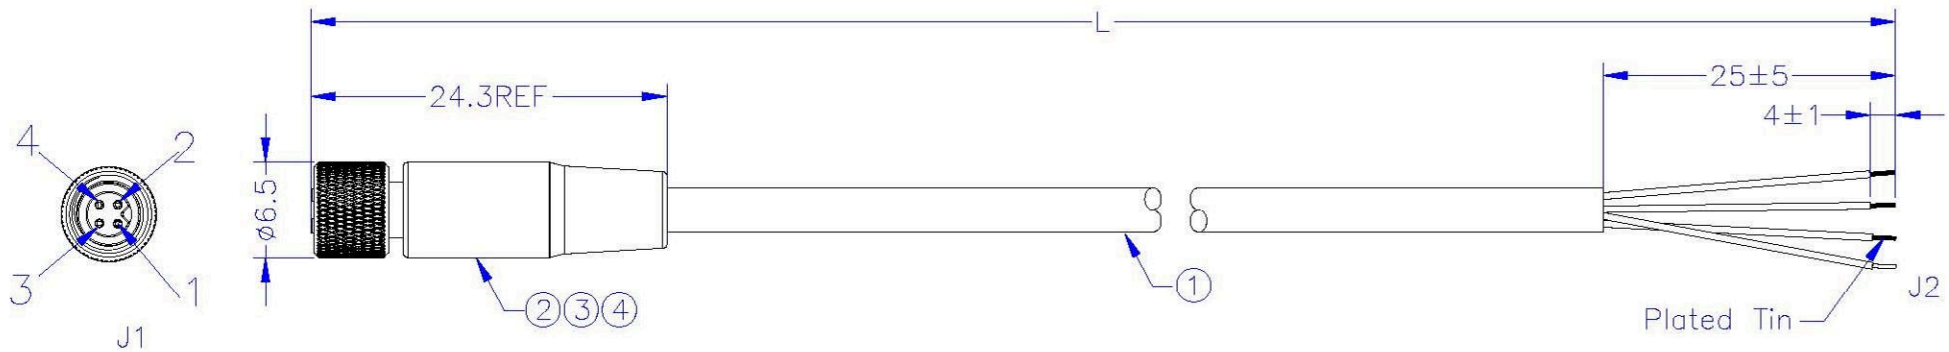

LENGTH

Part number	L
5L012-300	300±20mm
5L012-1000	1000±30mm
5L012-2000	2000±40mm
5L012-3000	3000±40mm
5L012-5000	5000±50mm
5L012-10000	10000±100mm



Electrical Performance:
 1.100%TESTED FOR OPENS SHORTS
 2.INSULATION RESISTANCE: 5M ohm
 3.CONNECTING RESISTANCE: 5 ohm
 4.HI-POT:DC 300V 10ms

Electrical Character
 Rating voltage: 60V AC/DC
 Insulation resistance: >100MΩ
 Rating current: 1A
 Contact resistance: ≤5mΩ

General Information
 Standard: IEC 61076-2-105
 Connector Body: TPU
 Contacts: Brass with gold plated
 Connector Locking System: Screw-locking
 Waterproof Rating: IP67/IP68

Pin Out

J1	COLOR	J2
1	BROWN	OPEN
2	WHITE	
3	BLUE	
4	BLACK	
shell	Grounded shield	

UNDECLARED TOLERANCE		CUS P/N:	 深圳市西米连接科技有限公司 XIME CONNECTOR TECHNOLOGY CO. LTD
X. ±1.0	X. ° ±2.0°		
.X±0.5	.X° ±1.0°	PART NO. : 5L012-4P/F	TITLE: M5 CABLE
.XX±0.2	.XX° ±0.5°	APPD. :	DWG NO. :
④	85A black TPU -40°C~+105°C	10g	
③	Nut 5.1*6.5mm Brass with nickel plated	pc	
②	M5 4pin female connector	1Set	SCALE
①	26AWG*3C+AL+D JACKET BLACK PVC CABLE OD=3.5mm -40~105°C	1Pcs	SHEET
ITEM	PART NAME	DESCRIPTION	REV.
			1:1
			1/1
			A

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF JH-C AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF JH-C.

DR. : HWJ_08/18/18'